

---

**FAN HEATERS  
LEO**




---

# TABLE OF CONTENT

■ GENERAL CHARACTERISTICS	3
■ CONSTRUCTION	4
■ COMPARE LEO SOLUTIONS	5
■ DIMENSIONS	6
■ TECHNICAL DATA	6
■ RANGES	8
■ VELOCITY OF THE AIR FLOW	9
■ INSTALLATION AND VARIOUS MOUNTING POSSIBILITIES	10
■ ACCESSORIES	12
■ REGULATION	15
■ CONTROL SYSTEMS	16
■ CONTROL ELEMENTS	17
■ BMS PROGRAMMING	19
■ FLOWAIR SYSTEM	19
■ CONNECTION DIAGRAMS	20
■ HEATING CAPACITIES	21
■ THE QUALITY LABEL	24
■ ACCREDITED TESTING LAB	25

# GENERAL CHARACTERISTICS



## Fan heater **LEO**

Heating capacity [kW]	0,7 - 121,0
Air flow [m <sup>3</sup> /h]	1000 - 5800
Weight [kg]	9,5 - 26,2
Casing	EPP <sup>(1)</sup>
Colour	grey <sup>(2)</sup>

<sup>(1)</sup> EPP is an expanded polypropylene, which is good thermal insulator, is resistant to dirt and has high ability of vibration damping. This features allowed to use it as a material for casing of the unit and lowered its total weight.

<sup>(2)</sup> similar to RAL 9007

## APPLICATION

LEO fan heaters are designed to operate indoors. They are used to heating rooms with a big cubic measure like industrial buildings, warehouses, departments stores, production halls, sports halls (gyms), sacral buildings etc. They can also be used in smaller rooms like workshops, garages, stores, car show rooms, gas stations etc.

## AVAILABLE TYPES OF UNITS

- LEO BMS**  
 LEO BMS fan heater is equipped with 3 speed fan controlled by the DRV module. The DRV module manages the operation of devices according to control signals from T-Box or directly from BMS.

### LEO

- LEO fan heater with AC fan offers possibility to switch between 3 steps of airflow.

**S1 | S2 | S3**



**L1 | L2 | L3**




**XL2 | XL3**




---

# CONSTRUCTION

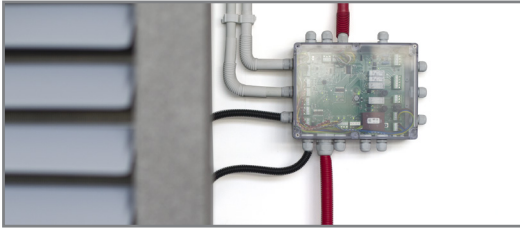


## BMS

Connection of devices to the BMS system (Building Management System) is possible via a T-box or HMI controller or via the DRV control module.

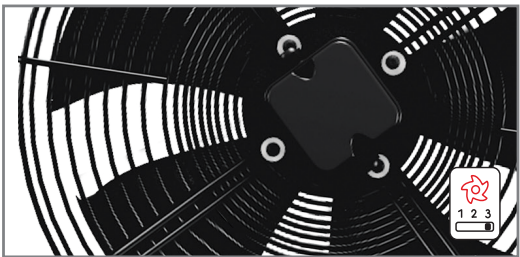

## 3-SPEED FAN

LEO fan heaters are equipped with 3 speed fans. It's the simplest and most effective way to control the fan heater's operation.

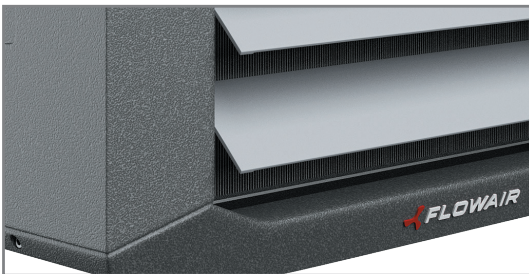

## EPP CASING

Mechanical strength, resistance to dirt, low weight and aesthetic look. By applying expanded polypropylene for casing construction, LEO fan heaters create a new quality in heating and ventilation.



## MIXING CHAMBER

LEO fan heaters with LEO KM mixing chamber form heating and ventilation unit. It is the easiest way to create the efficient mechanical ventilation without additional systems.



## THREE VERSIONS OF CASING

It is possible to choose a housing appropriate to the conditions prevailing in the facility. You can choose from:

**EPP** - casing made of expanded polypropylene (standard)

**INOX** - stainless steel casing (special request)

**RAL** - powder painted metal casing (special request)

# COMPARE LEO SOLUTIONS

When you need  
a simple solution!

## LEO

*linia Basic*



### BENEFITS

- the cheapest offer on the market (as a kit)
- easy connection
- 3-speed manual efficiency control

### SET



#### Fan heater LEO

- 3 speed fan
- light and durable EPP casing
- wide range of heating power 0,7-121 kW



#### Rotating console

- 170° rotation of the device
- mounting- wall and ceiling
- possibility of mounting at different angles to the surface



#### TS - 3 -step regulator with thermostat

- 3 speed efficiency control
- continuous and thermostatic mode
- heating and ventilation function

Intelligent solutions compatible  
with **FLOWAIR SYSTEM**

## LEO BMS



### BENEFITS


- intelligent solutions and energy savings
- control up to 31 devices compatible with the FLOWAIR SYSTEM
- BMS control
- local regulation
- 3-speed automatic efficiency control
- easy connection

### SET



#### Fan heater LEO

- 3 speed fan
- light and durable EPP casing
- wide range of heating power 0,7-121 kW



#### Rotating console

- 170° rotation of the device
- mounting- wall and ceiling
- possibility of mounting at different angles to the surface



#### DRV V - control module

- power 230 V
- IP54 protection
- wall mounted



#### PT-1000 IP65 - wall mounted temperature sensor


- IP65 protection
- wall mounted

Add  
to the set




**T-box**  
Intelligent touch  
screen controller  
controls up to 31 units


# DIMENSIONS

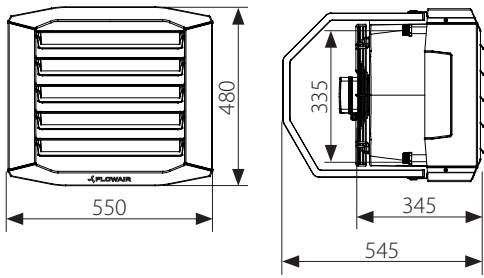

LEO S1 | S2 | S3 / LEO S1 BMS | S2 BMS | S3 BMS

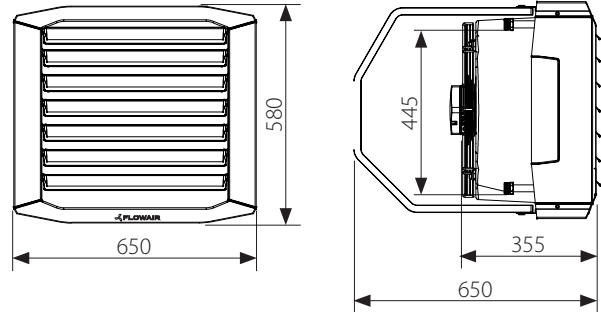

LEO L1 | L2 | L3 / LEO L1 BMS | L2 BMS | L3 BMS

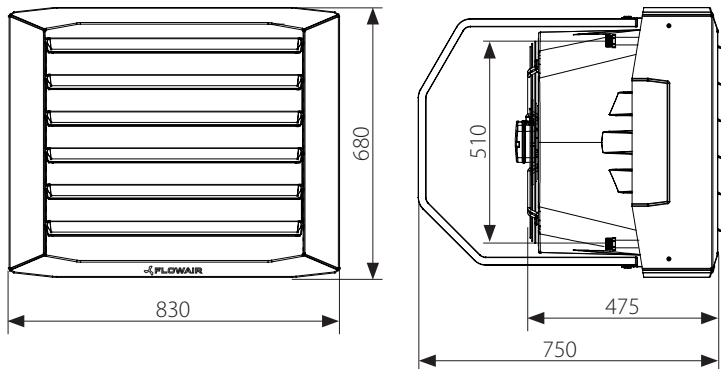

LEO XL2 | XL3 / LEO XL2 BMS | XL3 BMS

For CAD drawings, Revit files and documentation for all available versions of LEO visit [www.flowair.com](http://www.flowair.com)



# TECHNICAL DATA

## Fan heater LEO S

Step	LEO S1 / S1 BMS			LEO S2 / S2 BMS			LEO S3 / S3 BMS		
	III	II	I	III	II	I	III	II	I
Max. air flow stream [m <sup>3</sup> /h]	2300	1900	1500	2000	1600	1250	1800	1400	1000
Heating capacity [kW] <sup>(1)</sup>	0,7 – 12,8			2,1 – 26,5			1,7 – 32,7		
Nominal heat power (70/50/16°C, III-step) [kW]	4,5			10,2			12,3		
Power supply [V/Hz]	230/50			230/50			230/50		
Max. current consumption [A]	0,5	0,4	0,3	0,6	0,4	0,3	0,6	0,4	0,3
Max. power consumption [W]	120	90	70	130	90	70	130	90	70
IP/Insulation class	54/F			54/F			54/F		
Max. acoustic pressure level [dB(A)] <sup>(2)</sup>	56,3	50,7	43,9	56,3	50,7	43,9	56,3	50,7	43,9
Max. acoustic power level [dB(A)] <sup>(3)</sup>	71,4	65,8	59,0	71,4	65,8	59,0	71,4	65,8	59,0
Horizontal range [m] <sup>(4)</sup>	16,0	13,0	10,0	14,0	11,0	8,5	12,5	9,5	7,0
Vertical range [m] <sup>(5)</sup>	6,0	5,1	4,1	5,3	4,4	3,5	4,9	3,9	2,9
Max. heating water temperature [°C]	120			120			120		
Max. operating pressure [MPa]	1,6			1,6			1,6		
Connection	½"			½"			½"		
Max. operating temperature [°C]	60			60			60		
Weight of unit [kg]	9,5			10,4			10,8		
Weight of unit filled with water [kg]	10,2			11,6			12,2		

<sup>(1)</sup> range of heating power at given parameters – I step of fan, temperature of heating medium 40/30°C, air temperature at the supply to the device 20°C; max. – III step of fan, temperature of heating medium 120/90 °C, air temperature at the supply to the device 0°C;

<sup>(2)</sup> acoustic pressure level at the distance of 5 m from the unit, in the room of medium capability of sound absorption and 1500 m<sup>3</sup> of cubature

<sup>(3)</sup> in accordance with PN-EN ISO3744

<sup>(4)</sup> range of horizontal isothermal air stream, at 0,5 m/s velocity limit

<sup>(5)</sup> range of vertical nonisothermal air stream at ΔT = 5°C, at 0,5 m/s velocity limit

# TECHNICAL DATA

## Fan heater LEO L

	LEO L1 / LEO L1 BMS			LEO L2 / LEO L2 BMS			LEO L3 / LEO L3 BMS		
	III	II	I	III	II	I	III	II	I
Step	4250	2800	1700	3800	2400	1400	3400	2100	1200
Max. air flow stream [m <sup>3</sup> /h]	1,3 – 32,3			2,2 – 50,4			3,2 – 65,2		
Heating capacity [kW] <sup>(1)</sup>	11,7			19,1			25,6		
Nominal heat power (70/50/16°C, III-step) [kW]	230/50			230/50			230/50		
Power supply [V/Hz]	1,4	1,2	0,6	1,5	1,2	0,6	1,5	1,2	0,6
Max. current consumption [A]	330	240	120	340	240	120	340	240	120
Max. power consumption [W]	54/F			54/F			54/F		
IP/Insulation class	64,1	54,5	42,1	64,1	54,5	42,1	64,1	54,5	42,1
Max. acoustic pressure level [dB(A)] <sup>(2)</sup>	79,2	69,6	57,2	79,2	69,6	57,2	79,2	69,6	57,2
Max. acoustic power level [dB(A)] <sup>(3)</sup>	24,0	15,0	9,5	21,5	13,0	8,0	19,0	11,5	6,5
Horizontal range [m] <sup>(4)</sup>	8,3	5,6	3,7	7,5	4,9	3,1	6,8	4,4	2,8
Vertical range [m] <sup>(5)</sup>	120			120			120		
Max. heating water temperature [°C]	1,6			1,6			1,6		
Max. operating pressure [MPa]	¾"			¾"			¾"		
Connection	60			60			60		
Max. operating temperature [°C]	14,9			16,2			17,8		
Weight of unit [kg]	15,9			18,2			20,5		
Weight of unit filled with water [kg]									

## Fan heater LEO XL

	LEO XL2 / LEO XL2 BMS			LEO XL3 / LEO XL3 BMS		
	III	II	I	III	II	I
Step	5800	4600	2900	5300	4100	2500
Max. air flow stream [m <sup>3</sup> /h]	6,6 – 94,0			8,3 – 121,0		
Heating capacity [kW] <sup>(1)</sup>	36,5			48,1		
Nominal heat power (70/50/16°C, III-step) [kW]	230/50			230/50		
Power supply [V/Hz]	2,3	1,8	1,4	2,4	1,8	1,4
Max. current consumption [A]	520	370	270	550	370	270
Max. power consumption [W]	54/F			54/F		
IP/Insulation class	67,5	61,1	52,3	67,5	61,1	52,3
Max. acoustic pressure level [dB(A)] <sup>(2)</sup>	82,6	76,2	67,8	82,6	76,2	67,8
Max. acoustic power level [dB(A)] <sup>(3)</sup>	26,0	20,5	13,0	23,5	18,0	11,0
Horizontal range [m] <sup>(4)</sup>	8,5	7,0	4,7	7,7	6,2	4,1
Vertical range [m] <sup>(5)</sup>	120			120		
Max. heating water temperature [°C]	1,6			1,6		
Max. operating pressure [MPa]	¾"			¾"		
Connection	60			60		
Max. operating temperature [°C]	23,2			26,2		
Weight of unit [kg]	25,9			30,3		
Weight of unit filled with water [kg]						

<sup>(1)</sup> range of heating power at given parameters – I step of fan, temperature of heating medium 40/30°C, air temperature at the supply to the device 20°C; max. – III step of fan, temperature of heating medium 120/90 °C, air temperature at the supply to the device 0°C;

<sup>(2)</sup> acoustic pressure level at the distance of 5 m from the unit, in the room of medium capability of sound absorption and 1500 m3 of cubature


<sup>(3)</sup> in accordance with PN-EN ISO3744

<sup>(4)</sup> range of horizontal isothermal air stream, at 0,5 m/s velocity limit

<sup>(5)</sup> range of vertical nonisothermal air stream at ΔT = 5°C, at 0,5 m/s velocity limit

# RANGES


## HORIZONTAL RANGE OF AIR STREAM – isothermal

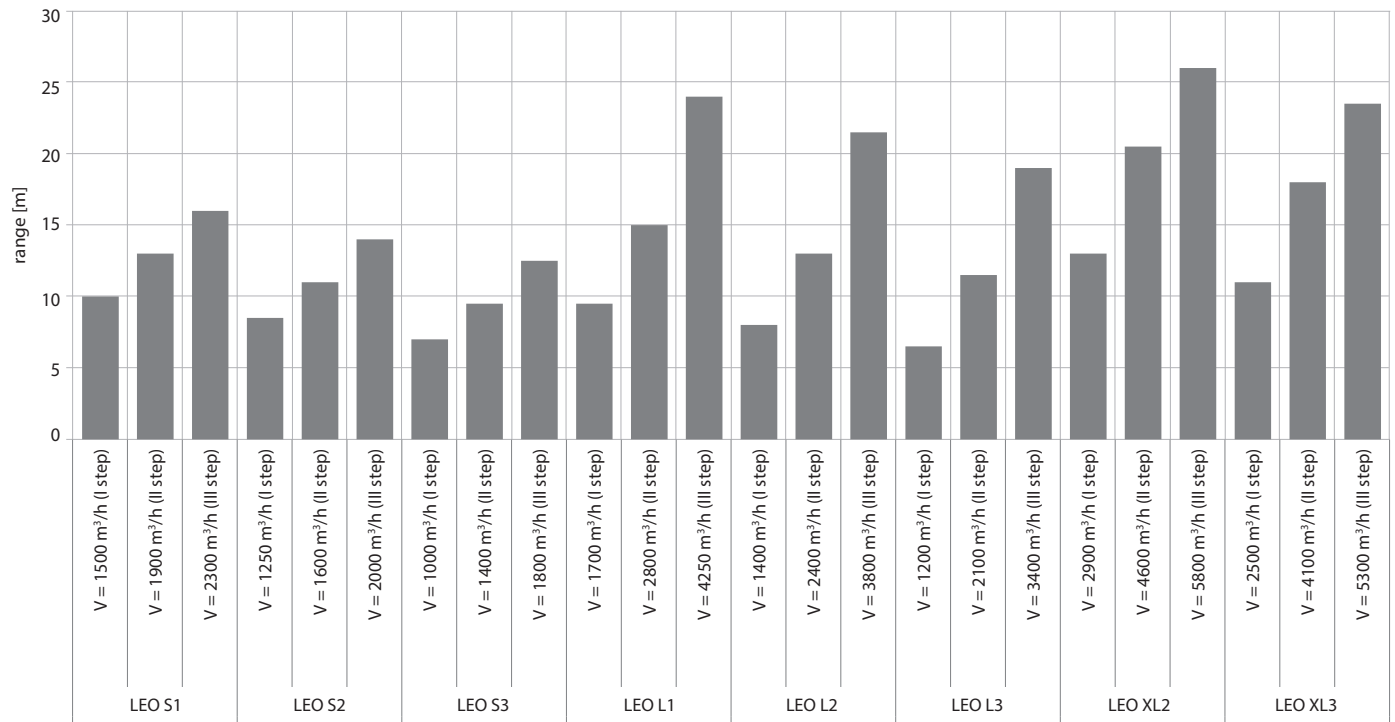

Horizontal range of isothermal stream at velocity boundary equal to 0,5 m/s.

V – air flow

## VERTICAL RANGE OF AIR STREAM – non-isothermal

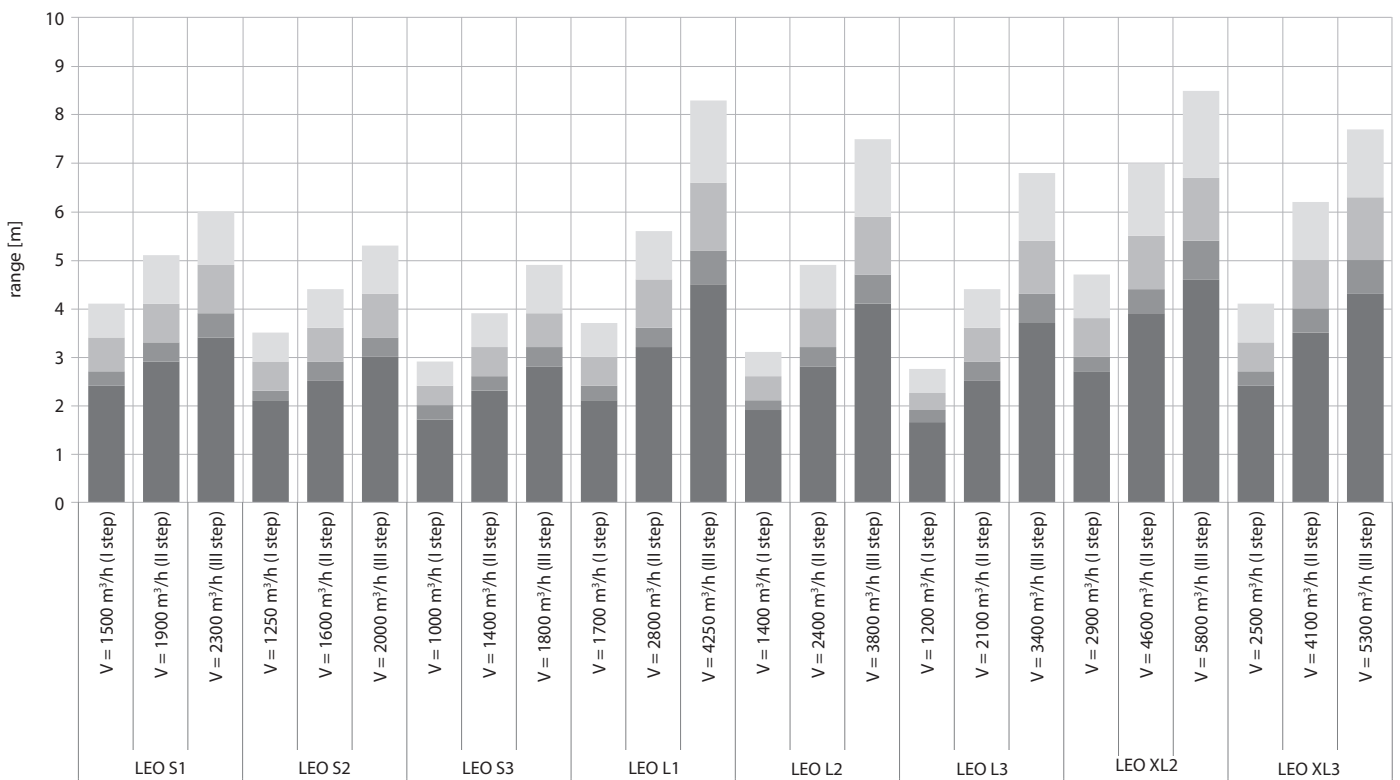

Vertical range of non-isothermal stream at velocity boundary equal to 0,5 m/s.


V – air flow

Δ5°C
  Δ10°C
  Δ20°C
  Δ30°C




# VELOCITY OF AIR FLOW


## LEO S1

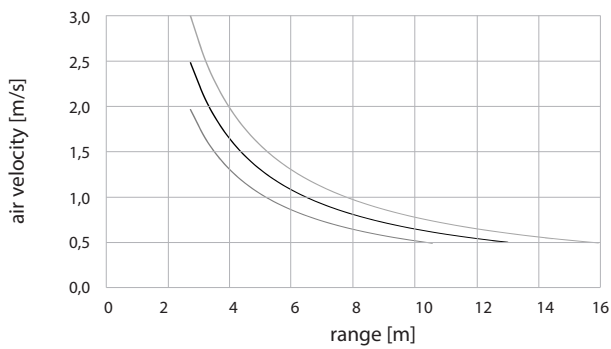


## LEO S2

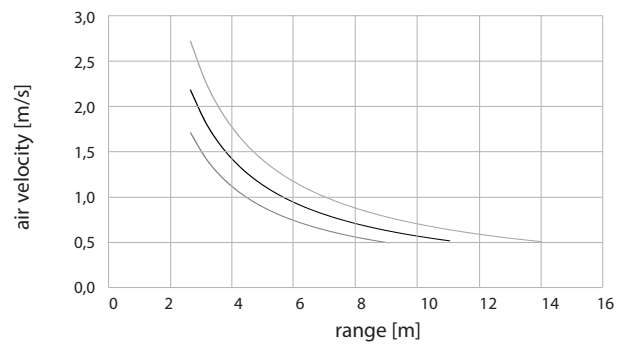


## LEO S3

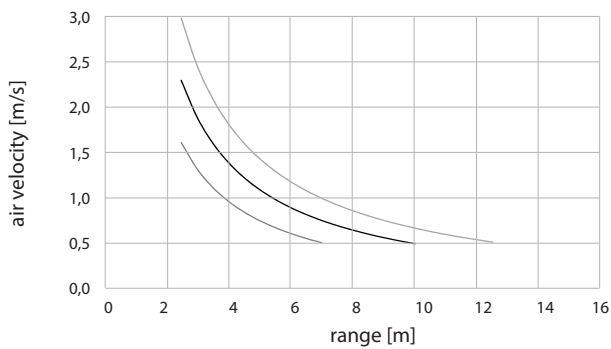


## LEO L1

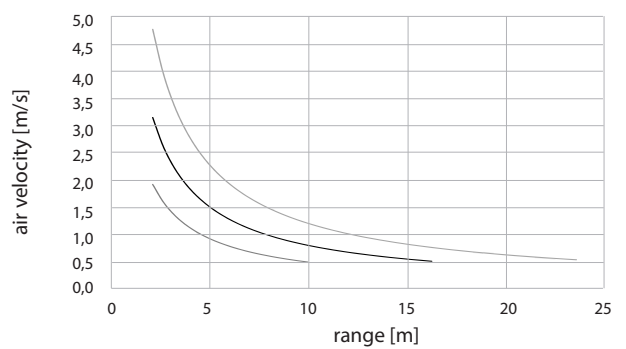


## LEO L2

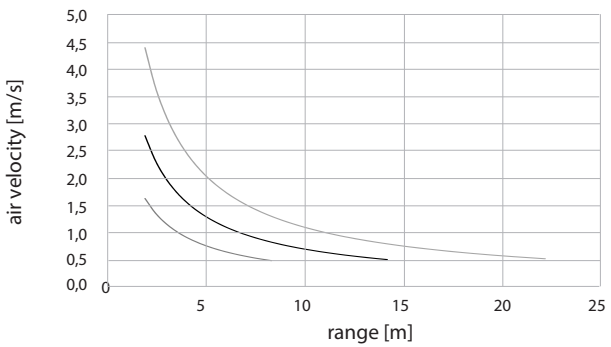


## LEO L3

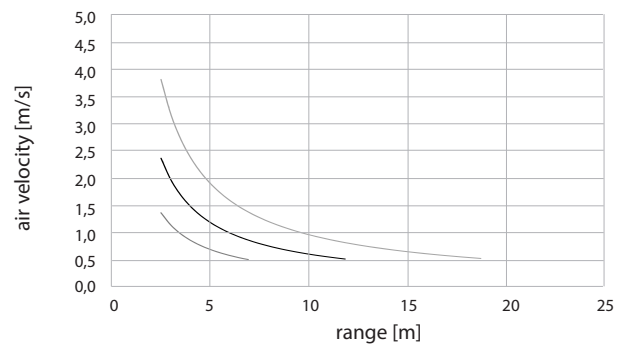

## LEO XL2

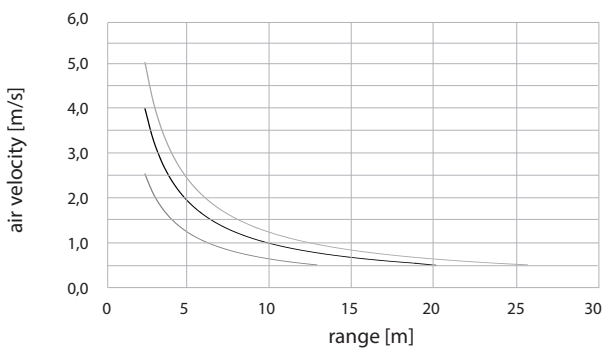

## LEO XL3

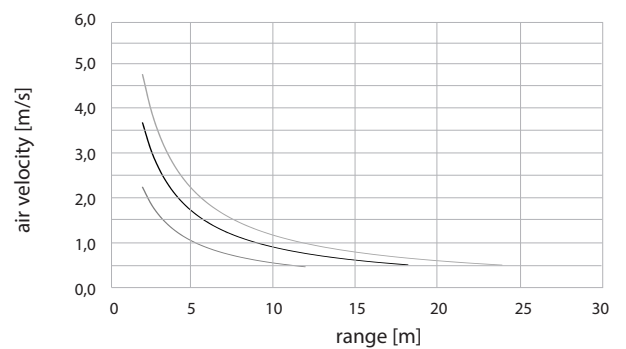


— I step    — II step    — III step

the above air flow velocity charts refer to the isothermal stream

# INSTALLATION AND VARIOUS MOUNTING POSSIBILITIES

possibility of setting the direction of air stream

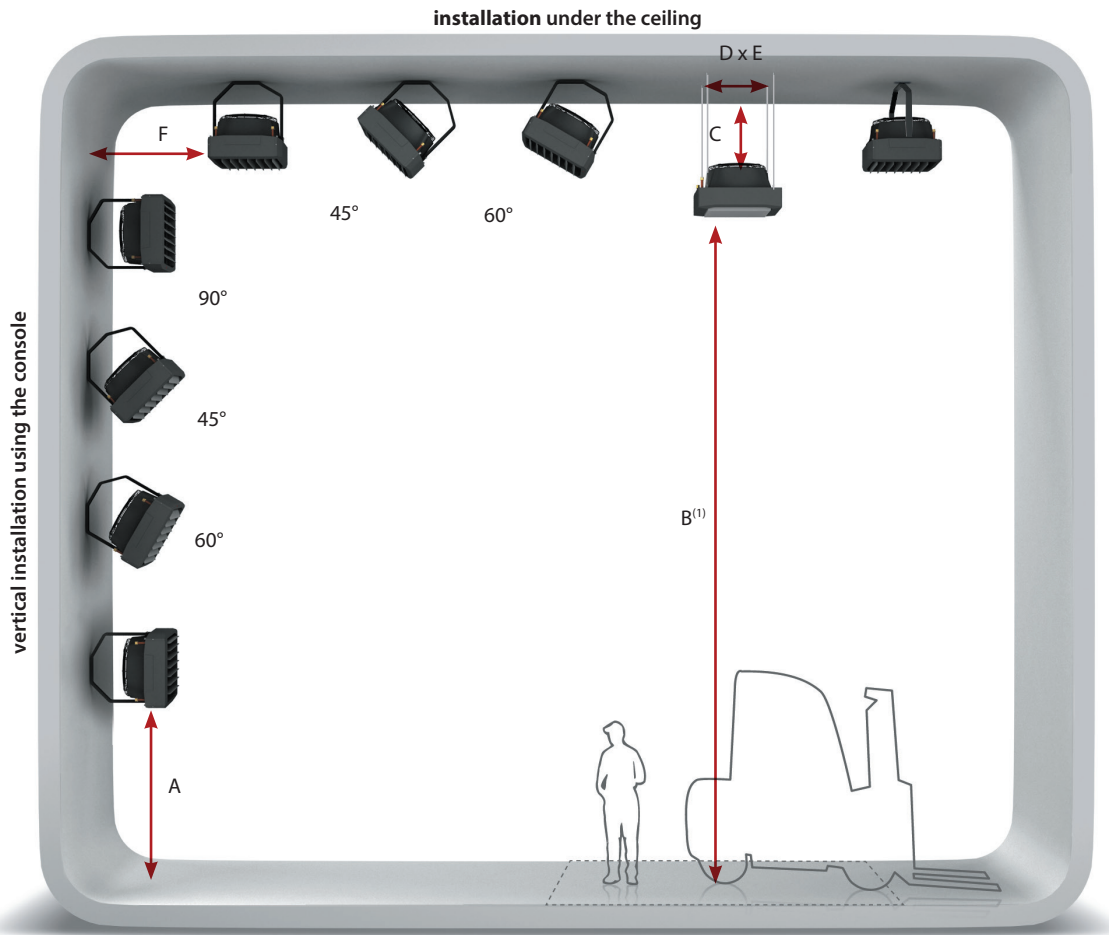

<sup>(1)</sup>When device is mounted under the ceiling please note the proper non-isothermal air stream range.



## Optional corner holders

There are corner brackets available which make installation and levelling of the heater easier.




## Rotary console

It enables installation of the heater perpendicularly or horizontally at various angles to the partition.


## RECOMMENDED INSTALLATION DISTANCE [m]

	S1	S2	S3	L1	L2	L3	XL2	XL3
A	max. 3,0	max. 3,0	max. 3,0	2,5–8,0	2,5–8,0	2,5–8,0	2,5–8,0	2,5–8,0
B	2,5–7,0	2,5–6,0	2,5–6,0	2,5–9,5	2,5–8,5	2,5–8,0	2,5–9,5	2,5–9,0
C	min. 0,3							
D	0,415	0,415	0,415	0,515	0,515	0,515	0,66	0,66
E	0,415	0,415	0,415	0,515	0,515	0,515	0,58	0,58
F	min. 0,5							


## INSTALLATION TIPS

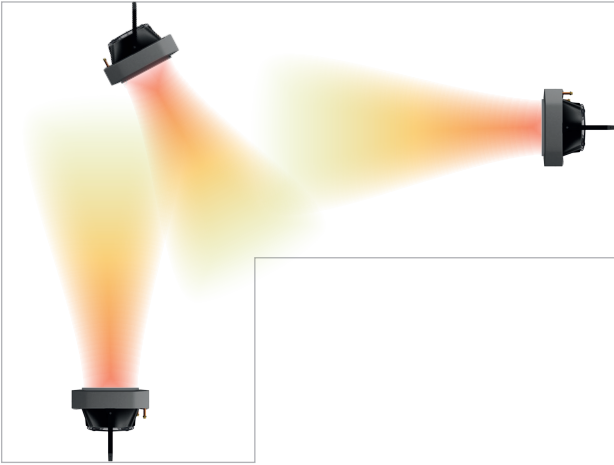


Steady air circulation should be provided in the entire room.

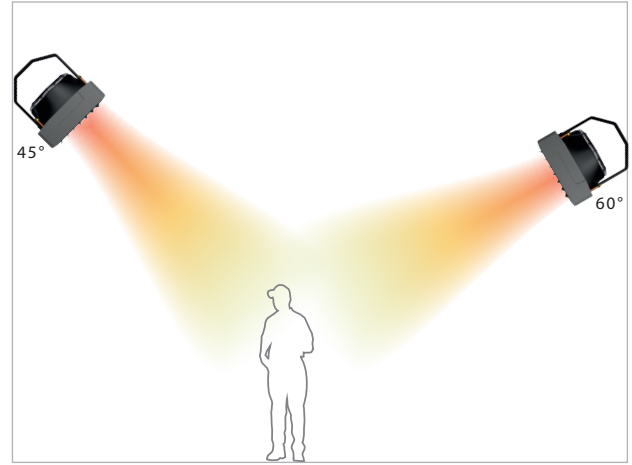


Correctly installed heaters should direct the air to the occupied zone.

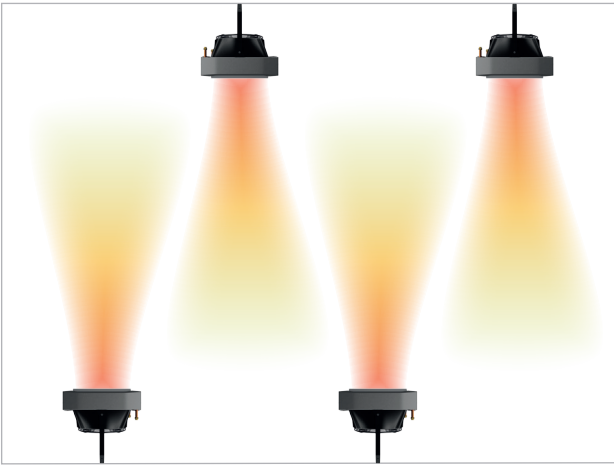


Heaters installed on the opposite walls should be overlapped.

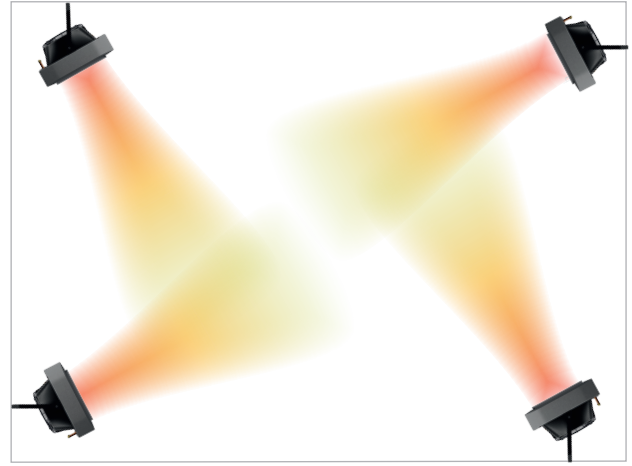

Heaters installed in the corners should direct the air to the center of the room.

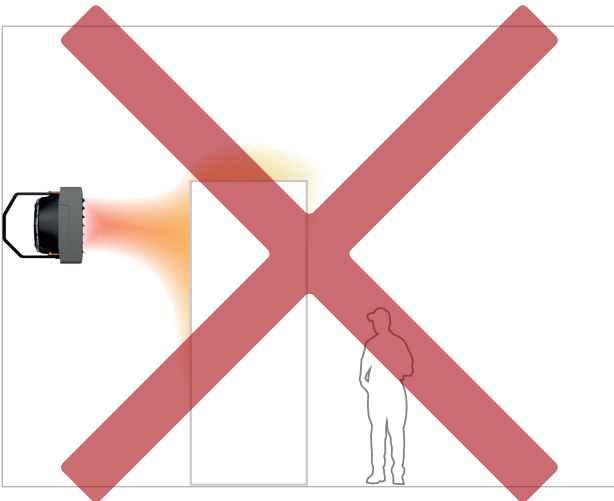

Air outlet should not be limited.

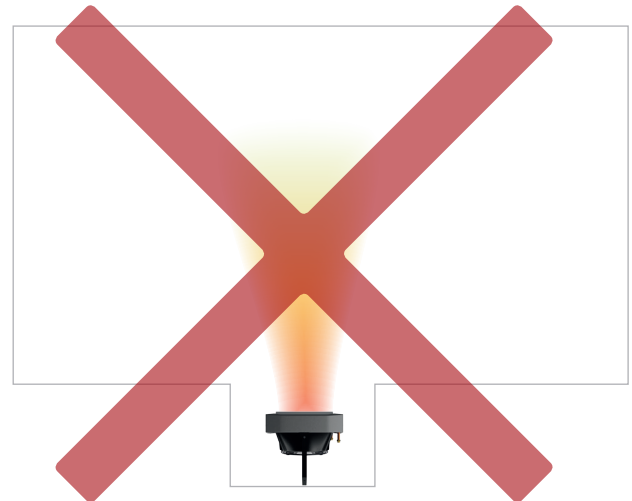

Air inlet should not be limited.

# ACCESSORIES - CONFUSOR LEO

dedicated for LEO L and XL




Confusor increases air flow speed. It results in faster air distribution to the lower zones of the room.

Material: powder painted metal RAL 9007  
Weight: 3,8 kg - confusor LEO L  
6,2 kg - confusor LEO XL




<sup>(1)</sup> When device is mounted under the ceiling please note the proper nonisothermal air stream range.

## DIMENSIONS



LEO L1 | L2 | L3 + L confusor



LEO XL2 | XL3 + XL confusor

# ACCESSORIES - 4-SIDE OUTLET GRILLE LEO


dedicated for LEO L and XL




4-side outlet grille improves air distribution. It is a perfect solution for low level ceiling rooms, where heaters are installed under the ceiling.

Outlet grille decreases nominal parameters of the unit by 10% in relation to technical data presented in the tables on pages 23–25.


Material: powder painted metal RAL 9007  
Weight: 2,8 kg - LEO L outlet grille  
4,8 kg - LEO XL outlet grille

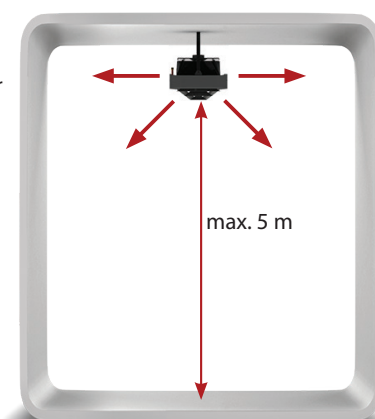

## DIMENSIONS



LEO L1 | L2 | L3 + L outlet grille



LEO XL2 | XL3 + XL outlet grille

# ACCESSORIES - MIXING CHAMBER KM





available to all models LEO

LEO fan heaters with LEO KM mixing chamber form heating and ventilation unit. It is the easiest way to create the efficient mechanical ventilation without additional systems.

## LEO + KM





## DIMENSIONS



LEO S1 | S2 | S3 + KM S / LEO S1 BMS | S2 BMS | S3 BMS + KM S

LEO L1 | L2 | L3 + KM L / LEO L1 BMS | L2 BMS | L3 BMS + KM L




LEO XL2 | XL3 + KM XL / LEO XL2 BMS | XL3 BMS + KM XL

For CAD drawings, Revit files and documentation for all available versions of LEO visit [www.flowair.com](http://www.flowair.com)



## INSTALLATION

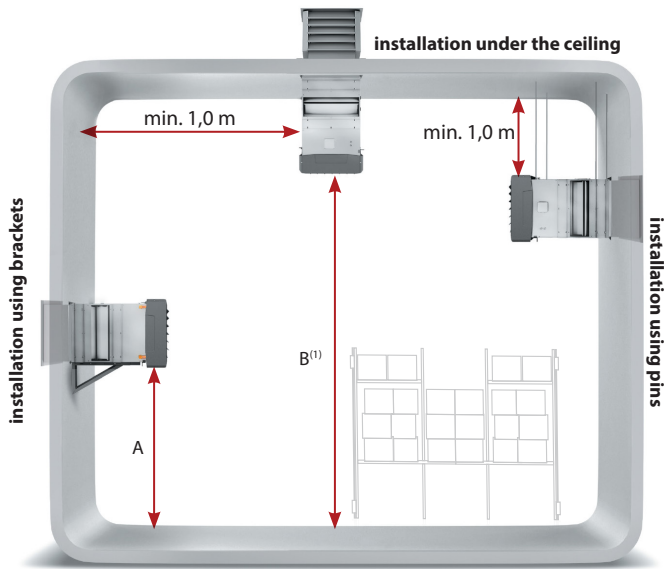

### LEO + KM + UVO



**Installation brackets**  
Enable easy and aesthetic installation on the walls.

<sup>(1)</sup> For air blades installed vertically. When mounting under a ceiling, the mounting height should be selected depending on the non-isothermal vertical range.

## RECOMMENDED INSTALLATION DISTANCE [m]

	LEO S1 + KM S	LEO S2 + KM S	LEO S3 + KM S	LEO L1 + KM L	LEO L2 + KM L	LEO L3 + KM L	LEO XL2 + KM XL	LEO XL3 + KM XL
A	max. 3,0	max. 3,0	max. 3,0	2,5 – 5,0	2,5 – 5,0	2,5 – 5,0	2,5 – 5,0	2,5 – 5,0
B	2,5 – 4,5	2,5 – 4,0	2,5 – 4,0	2,5 – 6,5	2,5 – 6,0	2,5 – 5,5	2,5 – 7,0	2,5 – 6,0

## TECHNICAL DATA

### Fan heater with mixing chamber **LEO KM**

	LEO S1 + KM S	LEO S2 + KM S	LEO S3 + KM S	LEO L1 + KM L	LEO L2 + KM L	LEO L3 + KM L	LEO XL2 + KM XL	LEO XL3 + KM XL
Max. air flow stream [m <sup>3</sup> /h] <sup>(1)</sup>	1200	1100	1000	2600	2400	2250	3700	3100
Nominal heat power (70/50/16°C, III step) [kW]	3,1	7,2	8,3	9,1	14,4	19,5	27,4	33,0
Power supply [V/Hz]	230/50			230/50			230/50	
Max. current consumption [A]	0,5	0,6	0,6	1,4	1,5	1,5	2,3	2,4
Max. power consumption [W]	110	130	130	320	340	340	520	550
IP/Insulation class	54/F			54/F			54/F	
Max. acoustic pressure level [dB(A)] <sup>(2)</sup>	56,3			64,1			67,5	
Max. acoustic power level [dB(A)] <sup>(3)</sup>	71,4			79,2			82,6	
Horizontal range [m] <sup>(4)</sup>	8,0	7,5	7,0	14,5	13,5	12,5	16,5	14,0
Vertical range [m] <sup>(5)</sup>	3,4	3,2	2,9	5,3	5,0	4,7	5,8	4,9
Max. heating water temperature [°C]	120			120			120	
Max. operating pressure [MPa]	1,6			1,6			1,6	
Connection	½"			¾"			¾"	
Weight of unit [kg]	25,9	26,8	27,9	34,3	35,5	37,8	53,6	57,9
Weight of unit filled with water [kg]	26,6	28,0	29,3	35,3	37,5	40,5	56,3	62,0

<sup>(1)</sup> efficiency with air intake/inlet and 100% fresh air

<sup>(2)</sup> acoustic pressure level at the distance of 5 m from the unit, in the room of medium capability of sound absorption and 1500 m<sup>3</sup> of cubature

<sup>(3)</sup> in accordance with PN-EN ISO3744

<sup>(4)</sup> range of horizontal isothermal air stream, at 0,5 m/s velocity limit

<sup>(5)</sup> range of vertical non-isothermal air stream at T = 5°C, at 0,5 m/s velocity limit

# REGULATION

## T-box REGULATION FOR LEO

LEO BMS fan heaters are equipped with an external DRV V control module, which together with the T-box controller enables:

- 3-step automatic or manual fan speed regulation,
- operating modes: heating, ventilation,
- fan operation in continuous mode (after reaching set temperature, heating medium is cut off while fan is operating at selected step), or thermostatic mode (after reaching set temperature, heating medium is cut off and fan is turned off),
- antifreeze – automatic protection against too low temperature in the room,
- weekly programmer,
- integration with FLOWAIR SYSTEM.

### CONNECTING DEVICES:

The system is adapted to connect fan heaters and control up to 31 devices compatible with the FLOWAIR SYSTEM via single T-box controller.

### BMS:

The T-box controller or the DRV V control module can be connected to the intelligent building management system BMS. This solution enables control of all devices communicating with the T-box controller and the DRV V control module.



T-box

## HMI REGULATION FOR LEO

It is an advanced 3-speed fan regulation system using the HMI programmable controller, which enables:

- 3-step automatic or manual fan speed regulation,
- operating modes: heating, ventilation,
- fan operation in continuous mode (after reaching set temperature, heating medium is cut off while fan is operating at selected step), or thermostatic mode (after reaching set temperature, heating medium is cut off and fan is turned off),
- antifreeze – automatic protection against too low temperature in the room,
- weekly programmer.

### CONNECTING DEVICES:

One HMI controller allows you to control: max. 5 units LEO S1 | S2 | S3, max. 2 units LEO L1 | L2 | L3 and max. 1 unit LEO XL2 | XL3.

### BMS:

The HMI controller can be connected to the intelligent building management system BMS. This solution enables control of all devices communicating with the HMI controller.



HMI

## TS REGULATION FOR LEO

This is the simplest 3-speed fan control system. The work of the fan heater is controlled by a 3-steps thermostat-controlled regulator that allows:

- 3-step manual fan speed regulation,
- operating modes: heating, ventilation,
- an operation in continuous mode (after reaching set temperature, heating medium is cut off while fan is operating at selected step), or thermostatic mode (after reaching set temperature, heating medium is cut off and fan is turned off).

### CONNECTING DEVICES:

One TS controller allows you to control: max. 7 units LEO S1 | S2 | S3, max. 3 units LEO L1 | L2 | L3 or max. 2 units LEO XL2 | XL3.



TS

# CONTROL SYSTEMS



**TS CONTROLLER**  
basic version

the simplest regulation of 3-step fans. Fan heater operation is controlled by 3-step fan speed controller with thermostat.



**HMI CONTROLLER**  
basic version

the advanced regulation of 3-step fans via HMI programmable controller.



**T-box CONTROLLER**  
BMS version

the intelligent regulation system of 3-step fans. Speed regulation of energy-efficient fan via T-box controller.

## Fan heater LEO



Controller **TS**



Controller **HMI**



Controller **T-box**

### Types of regulation/control

- Manual 3-step air flow regulation
- Automatic 3-step air flow regulation

### Modes

- Heating / Ventilation
- Operation in continuous or thermostatic mode
- Weekly programmer
- BMS
- Antifreeze
- Integration with FLOWAIR SYSTEM

### Max. number of connected units




- Via controller
- Via additional splitters

	Controller <b>TS</b>	Controller <b>HMI</b>	Controller <b>T-box</b>
Manual 3-step air flow regulation	✓	✓	✓
Automatic 3-step air flow regulation		✓	✓
Heating / Ventilation	✓	✓	✓
Operation in continuous or thermostatic mode	✓	✓	✓
Weekly programmer		✓	✓
BMS		✓	✓
Antifreeze		✓	✓
Integration with FLOWAIR SYSTEM			✓
Via controller	7	5	31
Via additional splitters	36	36	n/d





# CONTROL ELEMENTS

## I T-box REGULATION FOR LEO


Category	Symbol	Picture	Technical data
Controllers	T-box intelligent controller with touch screen		Protection degree: IP 20 Power supply: 24 VDC Temperature adjustment range: +5 ... +45°C Operating temperature range: 0 ... +60°C Max. wire diameter: 2,5 mm <sup>2</sup>
Control module <sup>(1)</sup>	DRV D control module		Protection degree: IP 54 Power supply: 230V/50Hz Dimensions: 230x180x55 mm Operating temperature range: 0 ... +60°C Number of connected units: 1 Max. wire diameter: 2,5 mm <sup>2</sup>
Temperature sensor <sup>(1)</sup>	PT-1000 IP65 wall-mounted temperature sensor IP65		Protection degree: IP65 Operating temperature range: -20 ... +80°C Max. wire diameter: 1,5 mm <sup>2</sup>

<sup>(1)</sup> LEO BMS devices are equipped with DRV V control module and a temperature sensor as a standard.

## I HMI REGULATION FOR LEO



Category	Symbol	Picture	Technical data
Controller	HMI programmable controller		Protection degree IP 20 Power supply: 230V/50Hz Temperature adjustment range: +5 ... +40°C Operating temperature range: 0 ... +50°C Contacts load: 3,0 A Max. wire diameter: 1,5 mm <sup>2</sup>
Additional equipment	NTC wall-mounted temperature sensor		Protection degree: IP65 Operating temperature range: -20 ... +80°C Max. wire diameter: 1,5 mm <sup>2</sup>

## I TS REGULATION FOR LEO

Category	Symbol	Picture	Technical data
Thermostat	TS 3-step fan speed regulator with thermostat		Protection degree: IP30 Power supply: 230V/50Hz Temperature adjustment range: +10 ... +30°C Operating temperature range: 0 ... +40°C Contacts load: 5 A Max. wire diameter: 1,5 mm <sup>2</sup>

# CONTROL ELEMENTS

## I T-box | HMI | TS REGULATION FOR LEO / LEO BMS

Category	Symbol	Picture	Technical data
Valves	SRQ2d-3/4 SRQ2d-1/2 two-way valve 3/4"   1/2" with actuator		Protection degree: IP20 Power supply: 230 V 50/60 Hz Max. water temperature: +93°C Max. operating pressure: 2,1 MPa Kvs: 3/4" – 6,5 m³/h; 1/2" – 3,0 m³/h Installation: on water outlet pipe Opening/closing time: 18s/5s Dimensions (HxWxL): 3/4" – 122x86x66; 1/2" – 108x86x66
Valves	SRQ3d-3/4 SRQ3d-1/2 three-way valve 3/4"   1/2" with actuator		Protection degree: IP20 Power supply: 230 V 50/60 Hz Max. water temperature: +93°C Max. operating pressure: 2,1 MPa Kvs: 3/4" – 6,5 m³/h; 1/2" – 3,4 m³/h Installation: on water inlet pipe Opening/closing time: 18s/5s Dimensions (HxWxL): 3/4" – 110x95x66; 1/2" – 122x93x66

# BMS PROGRAMMING

## FOR T-box | HMI REGULATION

Connection of devices to the BMS (Building Management System) is possible in three ways: through the T-box or HMI controller (Version 1) or through the DRV control module (Version 2).

### VERSION 1

T-box and HMI controllers enable connection of the system to BMS system (Building Management System). When monitoring devices via the T-box controller with one address in the BMS, it is possible to independently monitor the operation of up to 31 devices.

### VERSION 2

The DRV V control modules enable connection to the BMS system. It is possible to set up to 31 addresses. Setting the address for each device separately allows independent reading and saving of the work parameters of each device.

#### Communication parameters:

Name	T-box regulation	HMI regulation
Physical layer	RS485	RS485
Protocol	MODBUS-RTU	MODBUS-RTU
Transmission speed [bps]	9600 do 230400	2400
Parity	Even	Even
Number of data bits	8	8
Number of stop bits	1	1

#### Communication parameters:

Name	DRV V
Physical layer	RS485
Protocol	MODBUS-RTU
Transmission speed [bps]	38400
Parity	Even
Number of data bits	8
Number of stop bits	1


# FLOWAIR SYSTEM

FLOWAIR SYSTEM is an intelligent solution which makes it possible to integrate the devices into a system with only one controller. T-box offers many functions necessary for effective management of a heating-ventilating system. These function were previously reserved for an extensive Building Management System (BMS).




# CONNECTION DIAGRAMS


## LEO BMS REGULATION WITH T-BOX CONTROLLER

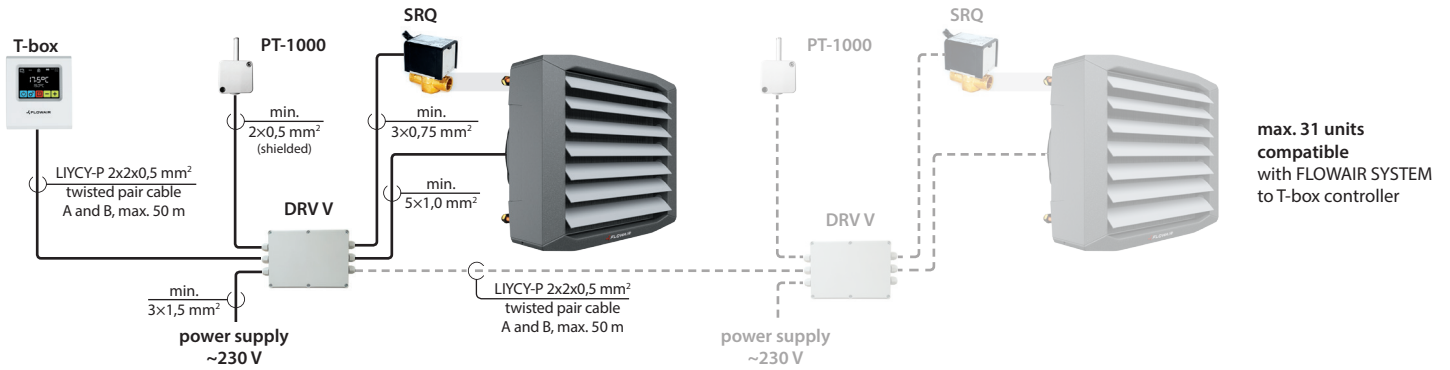

## LEO BMS REGULATION WITH HMI CONTROLLER

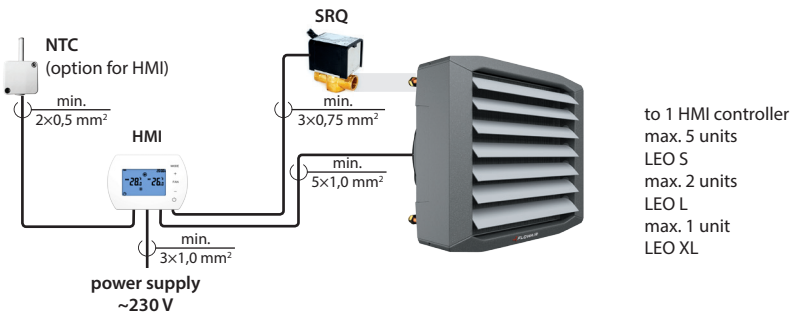

## LEO REGULATION WITH TS CONTROLLER

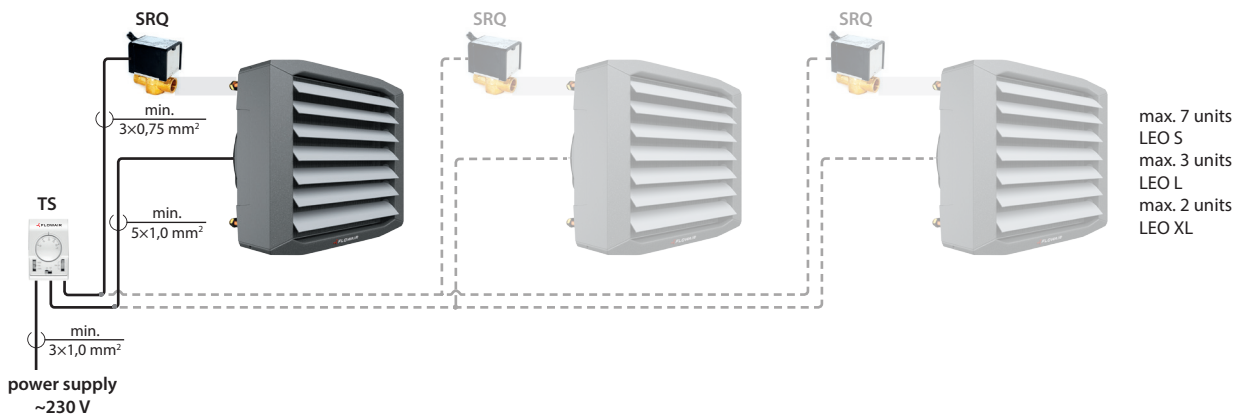





# HEATING CAPACITIES

Tw1 / Tw2 = 120/90°C					Tw1 / Tw2 = 90/70°C					Tw1 / Tw2 = 70/50°C					Tw1 / Tw2 = 60/40°C					Tw1 / Tw2 = 40/30°C				
Tp1	PT	Qw	Δpw	Tp2	Tp1	PT	Qw	Δpw	Tp2	Tp1	PT	Qw	Δpw	Tp2	Tp1	PT	Qw	Δpw	Tp2	Tp1	PT	Qw	Δpw	Tp2
[°C]	[kW]	[l/h]	[kPa]	[°C]	[°C]	[kW]	[l/h]	[kPa]	[°C]	[°C]	[kW]	[l/h]	[kPa]	[°C]	[°C]	[kW]	[l/h]	[kPa]	[°C]	[°C]	[kW]	[l/h]	[kPa]	[°C]
<b>LEO XL2 / LEO XL2 BMS</b>																								
<b>III step: V = 5800 m<sup>3</sup>/h</b>																								
0,0	94,0	2 799	23,1	52,5	0,0	71,6	3159	30,7	40,0	0,0	51,4	2248	17,5	28,5	0,0	41,2	1794	12,1	23,0	0,0	29,6	2 568	24,4	16,5
5,0	89,5	2 666	21,1	54,5	5,0	67,0	2958	27,2	42,0	5,0	46,8	2046	14,7	31,0	5,0	36,5	1591	9,7	25,5	5,0	24,9	2 161	17,9	19,0
10,0	85,1	2 533	19,2	57,0	10,0	62,5	2757	23,9	44,5	10,0	42,1	1843	12,2	33,5	10,0	31,8	1386	7,6	27,5	10,0	20,2	1 751	12,3	21,0
15,0	80,6	2 400	17,4	59,5	15,0	57,9	2556	20,8	47,0	15,0	37,5	1639	9,9	35,5	15,0	27,1	1179	5,7	30,0	15,0	15,4	1 336	7,6	23,5
20,0	76,2	2 269	15,7	61,5	20,0	53,4	2355	17,9	49,0	20,0	32,8	1433	7,8	38,0	20,0	22,2	969	4,0	32,0	20,0	10,5	910	3,8	25,5
<b>II step: V = 4600 m<sup>3</sup>/h</b>																								
0,0	81,2	2 416	17,6	57,0	0,0	61,7	2725	23,4	43,5	0,0	44,4	1941	13,4	31,0	0,0	35,6	1550	9,3	25,0	0,0	25,6	2 216	18,7	18,0
5,0	77,3	2 301	16,1	59,0	5,0	57,8	2552	20,8	45,5	5,0	40,4	1766	11,3	33,5	5,0	31,5	1375	7,5	27,0	5,0	21,5	1 866	13,8	20,0
10,0	73,4	2 186	14,7	61,0	10,0	53,9	2379	18,3	47,5	10,0	36,4	1592	9,4	35,5	10,0	27,5	1198	5,8	29,0	10,0	17,5	1 512	9,5	22,0
15,0	69,6	2 072	13,3	63,5	15,0	50,0	2206	15,9	49,5	15,0	32,4	1416	7,6	37,5	15,0	23,4	1019	4,4	31,0	15,0	13,3	1 154	5,8	24,0
20,0	65,8	1 959	12,0	65,5	20,0	46,1	2033	13,7	51,5	20,0	28,3	1239	6,0	39,5	20,0	19,2	838	3,1	33,0	20,0	9,1	786	3,0	26,5
<b>I step: V = 2900 m<sup>3</sup>/h</b>																								
0,0	59,5	1 770	10,0	66,0	0,0	45,2	1995	13,3	50,5	0,0	32,5	1424	7,7	36,0	0,0	26,1	1138	5,3	29,0	0,0	18,7	1 624	10,7	21,0
5,0	56,6	1 686	9,1	68,0	5,0	42,4	1869	11,8	52,0	5,0	29,6	1296	6,5	38,0	5,0	23,2	1010	4,3	30,5	5,0	15,8	1 368	7,9	22,5
10,0	53,8	1 603	8,3	69,5	10,0	39,5	1743	10,4	53,5	10,0	26,7	1169	5,4	39,5	10,0	20,2	881	3,4	32,5	10,0	12,8	1 110	5,5	24,0
15,0	51,0	1 520	7,6	71,0	15,0	36,6	1617	9,1	55,5	15,0	23,8	1040	4,4	41,0	15,0	17,2	750	2,5	34,0	15,0	9,8	847	3,4	26,0
20,0	48,3	1 437	6,8	72,5	20,0	33,8	1491	7,8	57,0	20,0	20,8	911	3,5	43,0	20,0	14,1	616	1,8	35,5	20,0	6,6	573	1,7	27,0
<b>LEO XL3 / LEO XL3 BMS</b>																								
<b>III step: V = 5300 m<sup>3</sup>/h</b>																								
0,0	121,0	3 602	18,7	74,0	0,0	91,6	4043	24,6	56,0	0,0	66,6	2916	14,4	41,0	0,0	54,0	2352	10,2	33,0	0,0	38,2	3 313	20,0	23,5
5,0	115,4	3 436	17,2	75,5	5,0	86,0	3794	21,9	57,5	5,0	60,9	2664	12,3	42,0	5,0	48,1	2097	8,3	34,5	5,0	32,4	2 807	14,9	25,0
10,0	109,9	3 270	15,7	76,5	10,0	80,3	3545	19,4	59,0	10,0	55,1	2411	10,2	43,5	10,0	42,2	1840	6,5	35,5	10,0	26,5	2 297	10,4	26,0
15,0	104,3	3 106	14,3	78,0	15,0	74,7	3296	17,0	60,0	15,0	49,3	2157	8,4	45,0	15,0	36,2	1580	5,0	37,0	15,0	20,5	1 777	6,6	27,5
20,0	98,9	2 944	12,9	79,5	20,0	69,1	3048	14,7	61,5	20,0	43,4	1900	6,7	46,0	20,0	30,1	1314	3,6	38,0	20,0	14,3	1 238	3,5	28,5
<b>II step: V = 4100 m<sup>3</sup>/h</b>																								
0,0	101,1	3 010	13,5	79,5	0,0	76,5	3376	17,7	60,0	0,0	55,8	2441	10,5	44,0	0,0	45,3	1972	7,4	35,5	0,0	32,0	2 770	14,5	25,0
5,0	96,5	2 872	12,4	80,5	5,0	71,8	3169	15,8	61,5	5,0	51,0	2232	8,9	45,0	5,0	40,4	1760	6,0	36,5	5,0	27,1	2 350	10,8	26,5
10,0	91,9	2 735	11,3	82,0	10,0	67,1	2962	14,0	62,5	10,0	46,2	2021	7,5	46,0	10,0	35,5	1546	4,8	38,0	10,0	22,2	1 926	7,6	27,5
15,0	87,3	2 599	10,3	83,0	15,0	62,5	2756	12,3	63,5	15,0	41,4	1810	6,1	47,0	15,0	30,5	1329	3,7	38,5	15,0	17,2	1 492	4,8	28,5
20,0	82,8	2 464	9,4	84,0	20,0	57,8	2551	10,6	64,5	20,0	36,5	1597	4,9	48,0	20,0	25,4	1107	2,7	39,5	20,0	12,0	1 040	2,6	29,5
<b>I step: V = 2500 m<sup>3</sup>/h</b>																								
0,0	69,6	2 072	6,8	90,0	0,0	52,6	2320	9,0	68,0	0,0	38,5	1687	5,4	50,0	0,0	31,4	1368	3,9	40,5	0,0	22,0	1 911	7,5	28,5
5,0	66,5	1 978	6,3	90,5	5,0	49,4	2179	8,0	68,5	5,0	35,3	1544	4,6	50,5	5,0	28,1	1223	3,2	41,0	5,0	18,7	1 625	5,6	29,0
10,0	63,3	1 885	5,8	91,0	10,0	46,2	2040	7,1	69,5	10,0	32,0	1401	3,9	51,0	10,0	24,7	1076	2,5	41,5	10,0	15,4	1 335	4,0	30,0
15,0	60,2	1 794	5,3	92,0	15,0	43,1	1900	6,3	70,0	15,0	28,7	1258	3,2	51,5	15,0	21,3	927	1,9	42,0	15,0	12,0	1 036	2,5	30,5
20,0	57,2	1 703	4,8	92,5	20,0	39,9	1761	5,5	70,5	20,0	25,4	1112	2,6	52,0	20,0	17,7	773	1,4	42,5	20,0	8,3	720	1,3	30,5

V – air flow  
 PT – heating capacity  
 Tp1 – inlet air temperature  
 Tp2 – outlet air temperature

Tw1 – inlet water temperature  
 Tw2 – outlet water temperature  
 Qw – water flow rate in heat exchanger  
 Δpw – water pressure drop in heat exchanger



## HEAT OUTPUT CALCULATOR

In order to select the device with other parameters scan QR code.



# THE QUALITY LABEL

The quality of a product such as a water heater is not only determined by its appearance, energy-saving, quality of workmanship and durability of used materials used. Out of all the product features that are presented today by manufacturers, the most important should be a reliable and clear presentation of the technical parameters of the device.

Currently, in order to make purchasing decisions, it is not easy to quickly and unambiguously compare the basic technical parameters of water heaters. This is due to from the fact that producers give heating power, air stream range or noise for various boundary conditions. Standardization and certification in some industries have solved this problem, but in others, such solutions are still not visible.

## WHY THE PRODUCT LABEL WAS CREATED?

FLOWAIR is first to introduce the new industry standard - quality labels dedicated to new series of LEO fan heaters. At the same time, it encourages other manufacturers of heaters to develop and implement clear guidelines for informing about water parameters of air heaters.

This would allow to standardize the method of administering water parameters of air heaters, which will enable customers to easily, quickly and - most importantly - objectively compare different devices producers and the selection of a product that meets their expectations.

## WHAT ENSURES THE QUALITY LABEL?

The label on FLOWAIR devices is a guarantee for all parties involved in the investment process. Reliable technical parameters of devices eliminate the risk connected with the investment. The client is sure that the devices were tested and the technical parameters are confirmed. We care about quality! That's why we cooperate with an independent, international and accredited testing lab. The results confirm technical parameters of our devices.

## WHICH DATA ARE ON THE LABEL?

The information on the label presents true parameters of the device – it's heating power, horizontal and vertical range of air stream, noise level. These parameters are measured in real life, boundary conditions that are present in most of facilities.

## ADVANTAGES FOR THE CUSTOMER




**Tested solution**



**Guarantee of quality**




**Saving time and money**



**QUALITY LABEL / ETYKIETA JAKOŚCI**

**LEO L2**




**64,1 dB**

Acoustic pressure level has been measured at max. airflow, 5 m from the unit, in a 1500 m<sup>3</sup> space with a medium sound absorption coefficient.

Poziom ciśnienia akustycznego przy max. wydajności, dla pomieszczenia objętości 1500 m<sup>3</sup> o średniej zdolności pochłaniania dźwięku, w odległości 5 m od urządzenia.

Maximal akoestisch drukniveau van de unit, gemeten op een afstand van 5 meter van de unit, in een ruimte met een inhoud van 1500m<sup>3</sup> en een gemiddeld vermogen aan geluidabsorptie.

Уровень звукового давления при макс. производительности, для помещения объемом 1500 м<sup>3</sup> со средним коэффициентом звукопоглощения, на расстоянии 5 м от аппарата.




**19,1 kW**

Heat power, at max. airflow, when the heating medium of 70/50°C air temperature at the supply 16°C.

Moc grzewcza, przy max. wydajności, czynnika grzewczym 70/50°C, temp. powietrza na wlocie 16°C.

Verwarmingvermogen bij maximale ventilatiehoeveelheid en watertemperatuur van 70°C / 50°C en aanzuigtemperatuur van 16°C.

Тепловая мощность при макс. производительности и темп. теплоносителя 70/50°C, темп. на входе в аппарат 16°C.




**21,5 m**

Range of horizontal isothermal air stream, at max. airflow and 0,5 m/s velocity limit.

Zasięg poziomy strumienia izotermicznego przy max. wydajności oraz prędkości granicznej 0,5 m/s.

Worp bij horizontale isothermische luchtstroom bij een maximale luchtsnelheid van 0,5 m/s.

Длина потока изотермического воздуха при макс. производительности и граничной скорости 0,5 м/с.



**7,5 m**


Range of vertical non-isothermal air stream at max. airflow, ΔT= 5°C and 0,5 m/s velocity limit.

Zasięg pionowy strumienia nieizotermicznego przy max. wydajności, ΔT= 5°C oraz prędkości granicznej 0,5 m/s.

Worp bij verticale niet isothermische luchtstroom, temperatuurverschil van 5°C en een maximale luchtsnelheid van 0,5 m/s.

Длина потока неизоотермического воздуха при макс. производительности, для ΔT = 5°C и при граничной скорости 0,5 м/с.

**ACCREDITED LABORATORY TESTED**





# ACCREDITED TESTING LAB

The testing lab is renowned company, carrying about high standards. The results are respected by all producers all over the world. The tests were carried out observing international regulations and norms. Based on these lab reports FLOWAIR developed quality labels.

## TEST OF EFFICIENCY

The test was carried out in an air flow chamber. The air flow has been designated for all 3 fan speeds of the device. This enabled gaining the real efficiency of the fan heaters, considering flow resistance of device's structure.




## TEST OF HEATING POWER

The heating power of the device was measured at 9 points: for different temperatures of the heating medium and for various air temperatures at the inlet to the device. Heating capacity was designated both from the air side and from water side, to compare and to correct measurements carried out. Measured and designated capacities of devices were the basis for preparation of a new heating power calculator..

## TEST OF ACCOUSTIC PRESSURE LEVEL

The measurement was made in an anechoic chamber. During the test the pressure and sound power of the device is determined in conditions reflecting the real working environment. It means that The water heater has been mounted to one partition reflecting sound, as in the case of wall mounting or under ceiling installation in real facilities.

## ACCREDITATION

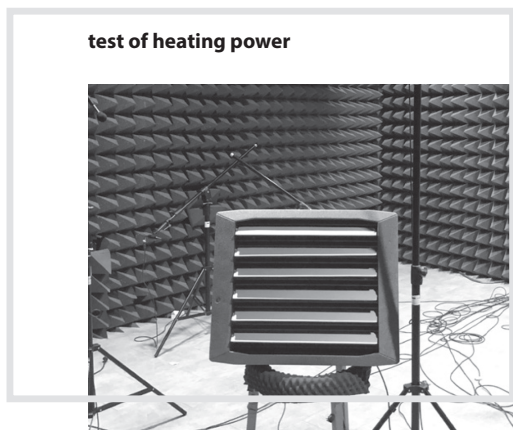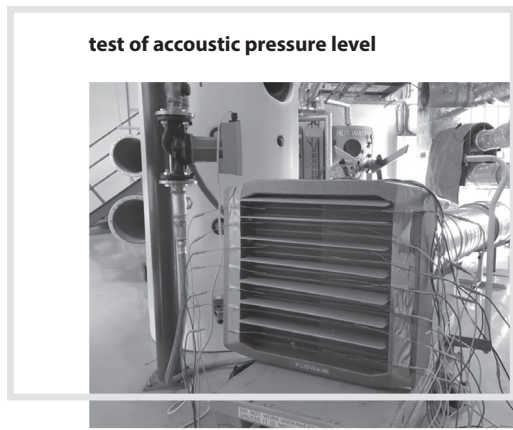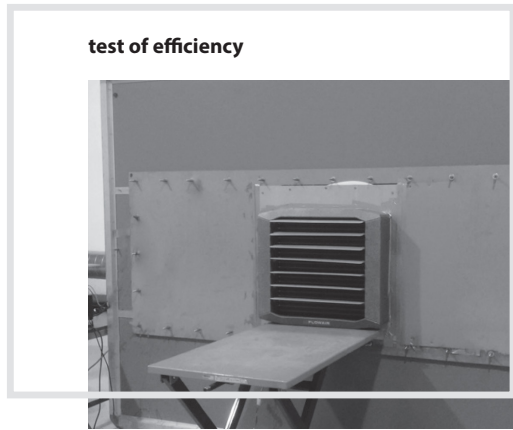

---

# NOTES

---

# NOTES



ul. Chwaszczyńska 135  
81-571 Gdynia, Poland

T: +48 58 627 57 20

for inquiries:  
[info@flowair.pl](mailto:info@flowair.pl)  
[www.flowair.com](http://www.flowair.com)

