



# HATHOR DEEP


892P  
893P

891  
892L  
893L




MADE IN ITALY


891




892L




893L

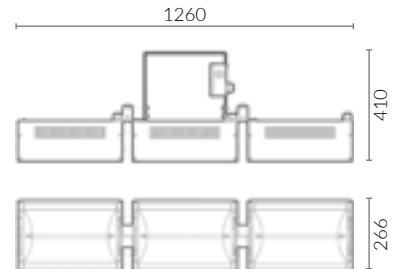

892P



893P

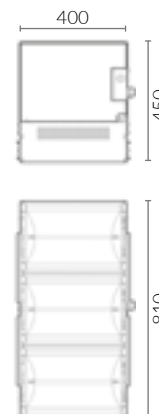

**HATHOR DEEP is the most powerful range of heating lamps available.**

The new special HATHOR DEEP line is designed to get to heat even in situations where the great distance would make any other model on the market ineffective.

The DEEP series overcomes the power challenge and provides unmatched irradiance performance, allowing lamps to be positioned at hitherto prohibitive distances.

HATHOR DEEP is the first fully modular shortwave heater, being able to be configured in as many as 5 version, 6 KW- both horizontally and vertically.




THREE-PHASE




THREE-PHASE



Lamp in the **STANDARD** position (inside the dish)  
 - Higher temperature  
 - More concentrated heat beam

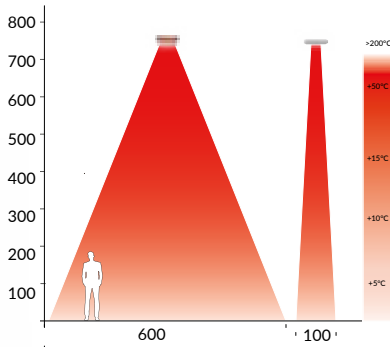

Lamp in the **DISASSEMBLED** position (inside the dish)  
 - Lower temperature  
 - More diffuse heat beam

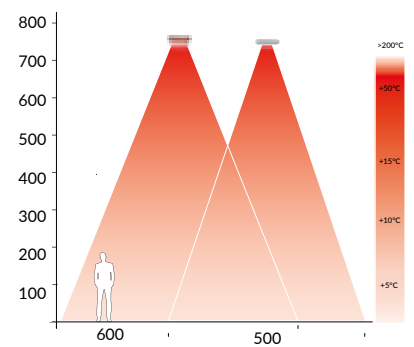

5ft 7 \* 5 \* 266 mm  
 2,5 kg  
 220-240V  
 50-60Hz  
 Single-phase  
 Gold  
 IR-A  
 wall bracket  
 2000W  
 6 m<sup>2</sup>  
 Aluminum  
 MOE891

891

400x450x266 mm  
 2,5 kg  
 220-240V  
 50-60Hz  
 Single-phase  
 Gold  
 IR-A  
 wall bracket  
 2000W  
 6 m<sup>2</sup>  
 Aluminum  
 MOE891

004722

892L

830x410x266 mm  
 3,93 kg  
 220-240V  
 50-60Hz  
 Single-phase  
 Gold  
 IR-A  
 wall bracket  
 4000W 9  
 m<sup>2</sup>  
 Aluminum  
 MOE892L

004722

893L

1260x410x266 mm  
 5,6 kg  
 380-415V  
 50-60Hz  
 Three-phase  
 Gold  
 IR-A  
 wall bracket  
 6000W  
 12 m<sup>2</sup>  
 Aluminum  
 MOE893L

004722

892P

400x450x540 mm  
 4,22 kg  
 220-240V  
 50-60Hz  
 Single-phase  
 Gold  
 IR-A  
 wall bracket  
 4000W  
 12 m<sup>2</sup>  
 Aluminum  
 MOE892P

004722

893P

400x450x810 mm  
 6,0 kg  
 380-415V  
 50-60Hz  
 Three-phase  
 Gold  
 IR-A  
 wall bracket  
 6000W  
 18 m<sup>2</sup>  
 Aluminum  
 MOE893P

004722

B CL~LNL% ~pL... HYB'E sp~pL>...), Y~LHs~pL'35'\*/ / 2/...%s ~>%p, E~s~pL'pL>'n>..p%o

: &&), 7 \* 5" \* Z ~  
 2 ~ %f153" \* ~ &7/ fV

IP55

